



DIN 862
(Style 1AR)

≤100 mm : 20 μm
>100 mm : 30 μm

Hardened
stainless steel

1.25 in
diameter rotating dial
with lock

Slider
with
locking screw

Steel gear
mechanism,
hardened and ground

Patented
shockproof design






Suited
plastic case

Identification
number

Inspection
report with a
declaration of conformity

Models TESA® CCMA-M

Easy-to-read dial calipers – Slider with metal dial housing – Models with a 200 mm or 300 mm measuring span fitted with a wheel drive.

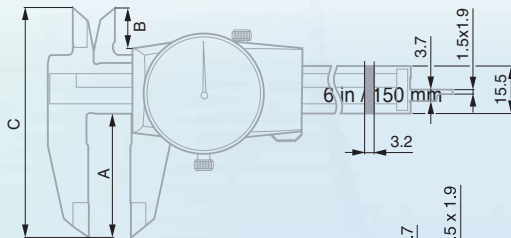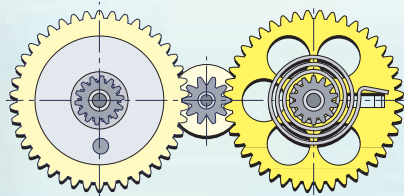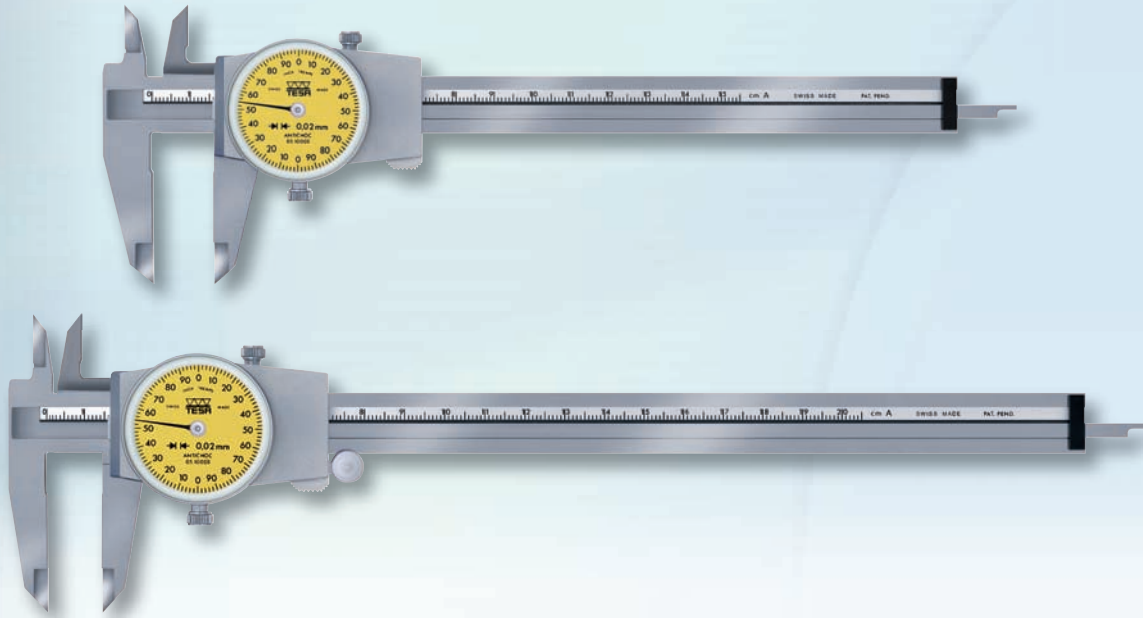

							A mm	B mm	C mm
05.10008	42509	0 - 150 mm	0.02 mm	2.0 mm	without		40	13	74
05.20002	29501	0 - 6 in	0.001 in	0.1 in	without		40	13	74
05.10045	28924	0 - 200 mm	0.02 mm	2.0 mm	with		50	18.6	89.5
05.10046	29503	0 - 300 mm	0.02 mm	2.0 mm	with		64	20.6	105.5

Optional Accessory

05.60013 42534 Depth measuring foot for models with a 6 in / 150 mm measuring span.